

Erledigt

Generelle Fragen zu DSDT

Beitrag von „Roman78“ vom 10. November 2017, 08:28


hab ich ja gemacht. Warte mal 30 Minuten. ich mach das Ding mal platt.

/edit... Jetzt will der nicht mehr installieren. Kann BaseSystemBinaries.pkg nicht extrahieren.


/edit2: Ich glaube mein Stick hat ein Schatten. Auch auf einem anderen PC will der nicht mehr.

/Edit3: So. Ich bin jetzt zuhause auf meinem Asus P5K SE. Hie geht es mit der Plist. Aber auf dem habe ich kein internet. Ich bekomme die Atheros L1 nichts ans laufen. Und MaciASL kann die DSDT nicht einlesen. Nicht über das ACPI als noch direkt aus der Datei. Kann es sein, dass das mainboard zu alt ist?

Dies ist der Fehler wenn ich es direkt von MaciASL aus dem ACPI lesen lasse:

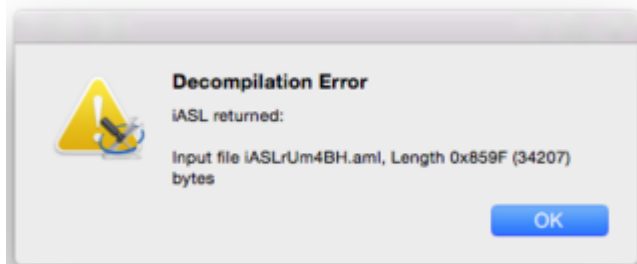

Und dies ist der Fehler wenn ich die von Clover generierte Datei einlesen lasse:

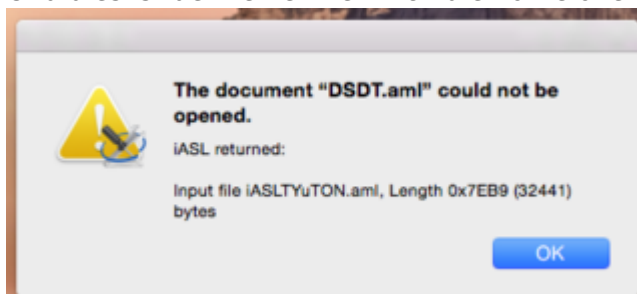

Und dies ist die Datei. Vielleicht kann mir dabei jemand helfen.

[DSDT.aml](#)

Und was mir auch aufgefallen ist - nun ja aufgefallen ist gut - wenn ich auf dem Mainboard ein Core2Quad installiere booten es, wenn ich ein Xeon installiere bleibt er während des booten hängen mit dieser Meldung bei einem Verbose boot:

```
AppleACPI000: ProcessorId02 LocalApicId01 Enabled
AppleACPI000: ProcessorId03 LocalApicId02 Enabled
AppleACPI000: ProcessorId04 LocalApicId03 Enabled
calling apm_policy_init for DTSafetyNet
Security policy loaded: Safety net for Time Machine (DTSafetyNet)
calling apm_policy_init for IMF
Security policy loaded: Apple Mobile File Integrity (IMFI)
calling apm_policy_init for Sandbox
Security policy loaded: Sandbox sandbox policy (Sandbox)
calling apm_policy_init for Quarantine
Security policy loaded: Quarantine policy (Quarantine)
Copyright (c) 1987, 1988, 1989, 1991, 1993
The Regents of the University of California. All rights reserved.

PMC Framework successfully initialized
using 16384 buffer headers and 10240 cluster ID buffer headers
AppleKeyStore starting (0001): Jul 29 2015 02:00:00
FakeSMCKeyStore: started
DSDT: Version 0x20 Version 04.07
RDT: sleep status 03 04 05
pci: build 02-08-07 Jul 29 2015), Flags 0x3000, pfa64 C0 qm0 0x3f000000, 0x00000000
RTC: Only single HW back (128 bytes)
FakeSMC: v6.23-311-g292050.1723 Copyright 2015 netkas, alioz, ur-wm2, kuziak, ruvi, The KING, RehabMan. All rights reserved.
FakeSMC: 14 preconfigured keys added
FakeSMC: 5 keys supported by Clover EFI
SMC: successfully initialized
acpi: 4 (0x0000) - 64 bytes CPU cache line size
acpi:ForSystemMap
Backtrace 0xffffffff00000000 0xffffffff00000000 0xffffffff00000000 0xffffffff00000000 0xffffffff00000000
PCI configuration begin 1
split: done CMC MB total pool size, 0x4/0x2 split
1
```