


# Ryzen 5 5600x und RX 6900 xt

Beitrag von „OSX-Einsteiger“ vom 1. August 2022, 00:23

[Zitat von tackerjim](#)

Hier mal die WLAN Karte inkl. Bluetooth:

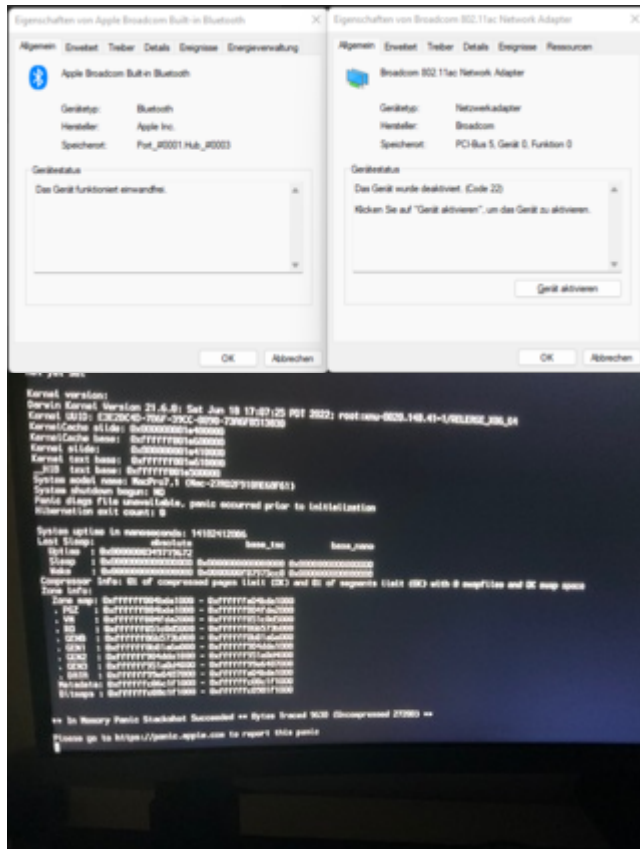

Keine Ideen?

Kannst du mal zusammen fassen was du zuletzt gemacht hast , auch wenn ich kein AMD b.s.w Wifi Guru bin 😊

Sonst hatte ich es hiermit versucht das muss nicht problem sein.

<https://dortania.github.io/Ope...fixing-kaslr-slide-values>

## Gelb in der log suchen Blau von HEX zu Dezimal konvertieren

```
21:450 00-000 SCANI: MPID dev1-v1 v1:K1
21:450 00-000 SCANI: MPID dev1-v1 0x00000000 (0-10000 pages, 0x0000000000000001) skip 0
21:500 00-000 SCANI: MPID dev1-v1 0x70000000 (0-11 pages, 0x0000000000000001) skip 0
21:500 00-000 SCANI: MPID dev1-v1 0x70000000 (0-11 pages, 0x0000000000000001) skip 0
21:510 00-000 SCANI: MPID dev1-v1 0x10000000 (0-11 pages, 0x0000000000000001) skip 0
21:510 00-000 SCANI: MPID dev1-v1 0x70000000 (0-11 pages, 0x0000000000000001) skip 0
21:510 00-000 SCANI: MPID dev1-v1 0x70000000 (0-1000 pages, 0x0000000000000001) skip 0
21:510 00-000 SCANI: MPID dev1-v1 end, saved 210000 kb
```

- Note: See [OpenCore Debugging](#) on how to enable logging to file

So we have 6 regions we need to go through and see which are bad, best idea is to block all MMD sections except one and try each region to get a lot of good regions.

Now lets take the above example and create our own MMDWhisker, we'll need to first convert the address from hexadecimal to decimal:

- MMD dev1-v1 0x000000000 -> 7670912786
- MMD dev1-v1 0x000000000 -> 4261412864
- MMD dev1-v1 0x700000000 -> 4377999676
- MMD dev1-v1 0x000000000 -> 4270443432
- MMD dev1-v1 0x000000000 -> 4270092906
- MMD dev1-v1 0x000000000 -> 4270092906

Should look something like this when done: